

NOTE:
TRENCH EDGE SHALL CREATE A CLEAN SEPARATION BETWEEN AREAS; AND SHALL CREATE SMOOTH AND EVEN LINES (AS INDICATED ON THE PLANS).

SPADE EDGE

NOT TO SCALE

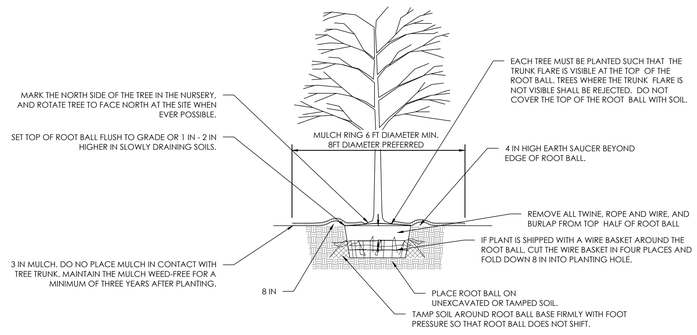

NOTE:
1. THIS DETAIL ASSUMES THAT THE PLANTING SPACE IS LARGER THAN AN 8' SQUARE OPEN TO THE SKY, AND NOT COVERED BY ANY PAVING OR GRATING.
2. STAKE TREES ONLY UPON THE APPROVAL OF THE LANDSCAPE ARCHITECT
3. WRAP TREE TRUNKS ONLY UPON THE APPROVAL OF THE LANDSCAPE ARCHITECT.
4. DO NOT HEAVILY PRUNE THE TREE AT PLANTING. PRUNE ONLY CROSSOVER LIMBS, CO-DOMINANT LEADERS, AND BROKEN OR DEAD BRANCHES. SOME INTERIOR TWIGS AND LATERAL BRANCHES MAY BE PRUNED; HOWEVER, DO NOT REMOVE THE TERMINAL BUDS OF BRANCHES THAT EXTEND TO THE EDGE OF THE CROWN.
5. FOR DIMENSIONS OF PLANTING AREAS, TYPES OF SOIL AMENDMENTS, OR SOIL REPLACEMENT, SEE "SOIL IMPROVEMENT DETAILS"

TREE PLANTING DETAIL, FOR B&B ALL SOIL TYPES

NOT TO SCALE

WIRE OR CABLE SIZES SHALL BE AS FOLLOWS:
TREES UP TO 2.5 IN CALIPER - 14 GAUGE
TREES 2.5 IN TO 75 MM 3 IN CALIPER - 12 GAUGE

TIGHTEN WIRE OR CABLE ONLY ENOUGH TO KEEP FROM SLIPPING. ALLOW FOR SOME TRUNK MOVEMENT. PLASTIC HOSE SHALL BE LONG ENOUGH TO ACCOMMODATE 1.5 IN OF GROWTH AND BUFFER ALL BRANCHES FROM THE WIRE.

TUCK ANY LOOSE ENDS OF THE WIRE OR CABLE INTO THE WIRE WRAP SO THAT NO SHARP WIRE ENDS ARE EXPOSED.

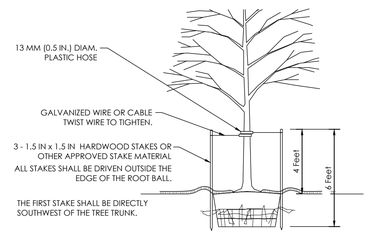

ASSURE THAT THE BEARING SURFACE OF THE PROTECTIVE COVERING OF THE WIRE OR CABLE AGAINST THE TREE TRUNK IS A MINIMUM OF 0.5 IN.

REMOVE ALL STAKING AS SOON AS THE TREE HAS GROWN SUFFICIENT ROOTS TO OVERCOME THE PROBLEM THAT REQUIRED THE TREE TO BE STAKED. STAKES SHALL BE REMOVED NO LATER THE END OF THE FIRST FULL GROWING SEASON AFTER PLANTING. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO REMOVE STAKING MATERIALS.

TREE STAKING DETAIL, 3" CALIPER OR LESS

NOT TO SCALE



PLAN VIEW

1. LOCATE (1) STAKE DIRECTLY SOUTHWEST OF TREE TRUNK

TREE STAKING DETAIL

NOT TO SCALE

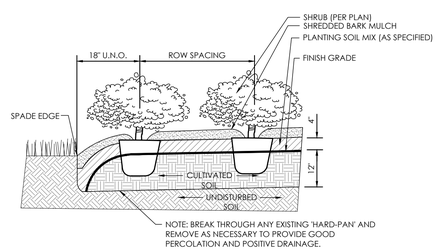

PLANTING PROCEDURE
1. LAYOUT BED AND OUTLINE WITH SPADE EDGE.
2. ROTOTILL BED TO 12" DEPTH.
3. SPREAD 4" MIN. LAYER OF PLANTING SOIL MIX OVER BED.
4. ROTOTILL PLANTING SOIL MIX INTO TOP OF BED.
5. INSTALL PLANTS, MULCH, AND WATER THOROUGHLY.

SHRUB MASS PLANTING

NOT TO SCALE

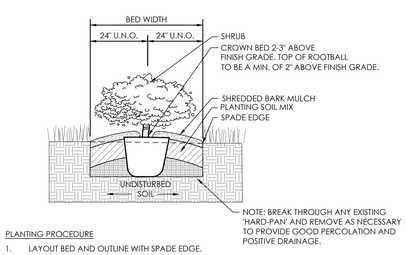

PLANTING PROCEDURE
1. LAYOUT BED AND OUTLINE WITH SPADE EDGE.
2. ROTOTILL BED TO 12" DEPTH.
3. SPREAD 6" MIN. LAYER OF PLANTING SOIL MIX OVER BED.
4. ROTOTILL PLANTING SOIL MIX INTO TOP OF BED.
5. INSTALL PLANTS, MULCH, AND WATER THOROUGHLY.

HEDGE PLANTING

NOT TO SCALE

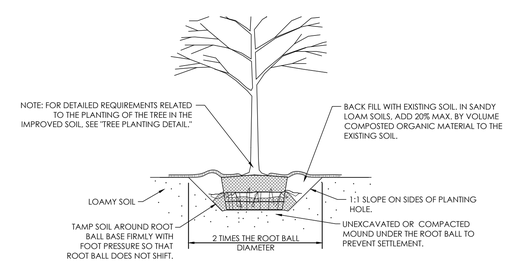

LOAMY SOILS INCLUDE THE FOLLOWING USDA TEXTURAL CLASSIFICATIONS AND HAVE A CLAY CONTENT OF BETWEEN 15 TO 27%: LOAM, SANDY LOAM AND SILT LOAM. NOTE THAT SOILS AT THE OUTER LIMITS OF THE LOAM CLASSIFICATIONS MAY PRESENT SPECIAL PLANTING PROBLEMS NOT ANTICIPATED BY THIS DETAIL.

LOAMY SOILS ARE DEFINED AS GRANULAR OR BLOCKY FRIABLE SOILS. A MIXTURE OF SAND, SILT AND CLAY PARTICLES WITH A MINIMUM OF 1.5% BY DRY WEIGHT ORGANIC MATTER. THE SOIL MUST NOT BE SO COMPACTED AS TO IMPEDE ROOT GROWTH OR DRAINAGE. THE SOIL STRUCTURE SHALL NOT BE PLATY OR MASSIVE. THE SOIL MUST BE TESTED FOR TEXTURE, DRAINAGE CAPABILITY, PH, AND NUTRIENT VALUES PRIOR TO DETERMINING ANY ADDITIONAL SOIL IMPROVEMENTS. CONTRACTOR SHALL CONSULT LANDSCAPE ARCHITECT IN POOR SOIL CONDITIONS.

1. TREES PLANTED IN NON RESTRICTED SOIL CONDITIONS. THIS DETAIL ASSUMES THAT THE AREA OF LOAMY SOIL AVAILABLE TO EACH TREE IS A MINIMUM OF 500 SQUARE FEET.

SOIL IMPROVEMENT DETAIL

NOT TO SCALE

REVISION BLOCK

NORTH CAROLINA PROFESSIONAL SEAL 041609 ENGINEER MICHAEL THOMPSON II

Michael Thompson

DATE 07/24/2017

DRAWN BY AMT | CHECKED BY MAT

HAMILTON DESIGNS
A LIMITED LIABILITY COMPANY
11988 Fishers Crossing Drive, Suite 154
Fishers, Indiana 46038
P. (317) 570-8800
www.hamilton-designs.com

CONSTRUCTION PLANS FOR:
TACO BELL | WARSAW
NC Highway 24
Warsaw, North Carolina 28398

BELL AMERICAN GROUP, LLC
8930 Bash Street, Suite L
Indianapolis, Indiana 46256

PROJECT NO. 2016-233

DATE 07/24/2017

SCALE

SHEET NAME
LANDSCAPE DETAILS

SHEET NO.
LP-501

p:\2016\233 - bell american group - warsaw, nc\drawings\lp-501.dwg